

Release Notes – Milestone XProtect™ Smart Wall 1.0

It is with great pleasure that Milestone Systems as of September 16, 2009, releases

Milestone XProtect Smart Wall 1.0

Milestone's Smart Wall for XProtect™ Corporate is an advanced add-on Video Wall product that through its unique flexibility and HW independence provides supreme situation awareness in larger surveillance centers and hence both enables higher efficiency and increased actionable response.



The new Smart Wall provides supreme situation awareness and intuitive control.

What's Benefits does XProtect Smart Wall 1.0 Provide?

XProtect Smart Wall is primarily intended for larger surveillance centers with high requirements to continuous situational awareness and instant responsiveness to incidents, but Smart Wall can even help medium scale surveillance centers to:

- ♦ Gain instant situational awareness by assisting the surveillance operators in focusing on the important matters
- ♦ Meet defined surveillance situations in conjunction with specific incidents, nightshifts, focus areas, etc.
- ♦ Consistently present video content across multiple video walls and individual users using the Smart Client
- ♦ Increase operational efficiency

Smart Wall Key Features

System

- Hardware agnostic - runs on standard servers and displays, no special Video Wall hardware or network configurations required
- Flexible and seamlessly scalable – supports any numbers of Smart Walls with any number and any combination of monitors at any location

Management

- Management of Smart Wall fully integrated with XProtect Corporate's management client
- Intuitive Smart Wall builder enables easy definition of numbers of Smart Walls, size and position of individual monitors
- Smart Wall presets provides powerful control of the layout (camera grid) and actual camera content
- All user actions are subject to assignment of user rights

XProtect is a registered trademark of Milestone Systems A/S. Microsoft and Windows are registered trademarks of Microsoft Corporation. All other trademarks mentioned in this document are trademarks of their respective owners. This document is intended for general information purposes only, and due care has been taken in its preparation. Any risk arising from the use of this information rests with the recipient, and nothing herein should be construed as constituting any kind of warranty. Milestone Systems A/S reserve the right to make adjustments without prior notification. All names of people and organizations used in this document's examples are fictitious. Any resemblance to any actual organization or person, living or dead, is purely coincidental and unintended.



Control

- Dynamic user control of Smart Wall layout and content through manual drag-and-drop of cameras and views into the Smart Wall via the Smart Client
- Automatic event driven control of Smart Wall layout and content based on rules, such as motion detection, I/O, integrated 3rd party applications, time, or video analytics events
- Layout control enables instant insertion of a camera in a specific monitor and position, changes of the Smart Wall monitor layout, setting of all (or some) of the monitors in the Smart Wall to a predefined layout and set of camera feeds
- Intuitive integration with the map function enables easy drag-and-drop of cameras in to the Smart Wall from the map

View

- Individual Smart Client users can view Smart Wall views as a part of the available view selection, which enables Smart Wall to be used as an operator collaboration tool

System Requirements

Being powered by the Smart Client, the Smart Wall application has the same requirements as a normal Smart Client.

XProtect Smart Wall 4.0

- HW Platform:
Minimum 2.4 GHz CPU, 1 GB RAM (more powerful CPU and higher RAM recommended for Smart Clients and Smart Walls running high number of cameras and multiple views and displays)
- Graphics Card:
AGP or PCI-Express, minimum 1024 x 768 (1280 x 1024 recommended), 16 bit colors
- OS:
Microsoft Windows XP Professional (32 bit or 64 bit*), Windows Server 2003/2008 (32 bit or 64 bit*), Windows Vista Business (32 bit or 64 bit*), Windows Vista Enterprise (32 bit or 64 bit*) and Windows Vista Ultimate (32 bit or 64 bit*)
- Software:
DirectX 9.0 or newer required to run Playback Viewer application
Microsoft .NET 3.5 Framework SP1, or newer

*) Running as a 32 bit service/application.

Supported Languages


XProtect Smart Wall 1.0 supports the same set of languages as Smart Client 4.0, which is: English, Arabic, Simplified Chinese, Traditional Chinese, Czech, German, Danish, Spanish, French, Hungarian, Italian, Japanese, Korean, Dutch, Polish, Russian, Swedish, Turkish and Slovak

Being fully integrated with XProtect Corporate's management client, the management of Smart Wall is only available in English.

Licensing

XProtect Smart Wall is an add-on product to XProtect Corporate and subject to separate licensing. XProtect Smart Wall is only compatible with XProtect Corporate 3.0, or higher. Hence, XProtect Smart Wall can NOT be used together with other video management platforms in the XProtect family.

The XProtect Smart Wall Application License permits connection of unlimited numbers of Smart Walls (incl. physical displays) and camera feeds.

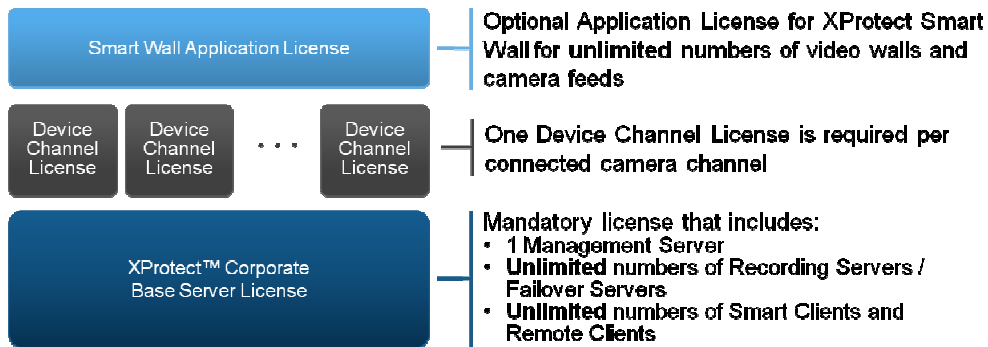

XProtect Corporate's easy and transparent licensing model.

Best regards,

The Milestone Team
www.milestonesys.com