



## Main Features

- Intel® Core™ 8th Gen. desktop, i7-8700T, 2.4GHz, 6 Core
- NVIDIA® GTX 1050Ti/1080 MXM graphic module supported
- 8 x 10/100/1000 PoE 802.3af/at
- 1 x VGA and 5 x HDMI video output
- ultraONE+ for 10-Meter video + audio output
- 2 x External SSD and 2 x mSATA for RAID 0, 1, 5, 10
- 2 x WWAN module and 3 x SIM socket with eSIM option
- Swappable fan kit
- 3 x mini-PCIe and 1 x M.2
- CE/FCC/E mark

## Product Overview

ATC 8010, powerful and reliable Artificial Intelligent (AI) platform, is specially designed for the applications, such as ANPR, AFR and highly-demanding on graphic performance. Its updated Intel® Coffee Lake desktop 35W CPU, and NVIDIA® 1050Ti/1080 graphic card guarantees the graphic performance, which satisfies with most of the Automated Intelligent (AI) requirement. 8-Port 802.3af/at PoE, offers wide bandwidth and precise control to the analysis of big video data. Besides, ultraONE+ technology commits the transmission of video and audio, up to 10 meters distance. 5 x HDMI and 1 x VGA let users monitor the immediate video without any delay and blind spot. RAID 0, 1, 5, 10 guarantees the safety of video data in the 2 x external SSD, and 2 x mSATA. The design of swappable fans makes it easier to maintain.

## Specifications

### CPU

- Intel® Core™ 8th Gen. i7-8700T processors, 2.4GHz, 35W, 6 core

### Chipset

- Intel® Q370 platform controller hub

### Memory

- 2-Channel 204-pin DDR4 SO-DIMM sockets up to 16GB/channel (32G for two channels), default 8GB industrial grade memory

### GPU

- ATC 8010-7A
  - NVIDIA® GeForce® GTX 1050Ti MXM module
  - Memory size: 4GB GDDR5
  - CUDA core: 768
  - GPU clock: 1493 MHz
  - Memory clock: 7.0 GHz
  - Memory interface width: 128-bit
- ATC 8010-7D
  - NVIDIA® GeForce® GTX 1080 MXM module
  - Memory size: 8GB GDDR5X
  - CUDA core: 2560
  - GPU clock: 1556 MHz
  - Memory clock: 10.0 GHz
  - Memory interface width: 256-bit

### Storage

- 2 x 2.5" SATA 3.0 external SSD
- 2 x mSATA

### Expansion

- 1 x Full size mini-PCIe socket (USB 2.0, PCIe 3.0, SATA 3.0)
- 1 x Full size mini-PCIe socket (USB 2.0), optional M.2 key B (3042)
- 1 x Full size mini-PCIe socket (USB 2.0, PCIe 3.0, SATA 3.0 (option))
- 1 x M.2 key B (USB 2.0, USB 3.1)

### GNSS and On Board Sensor

- 1 x Default U-blox NEO-M8N GNSS module for GPS/Glonass/QZSS/Galileo/Beidou
- Optional modules with dead reckoning available
- Built-in TPM 2.0


### Power over Ethernet

- 8-Port LAN, 10/100/1000 Mbps, PoE 802.3af/at, max. 60W
- 1-Port LAN, 10/100/1000 Mbps

### I/O Interface-Front

- 24 x LED indicators (including 4 x programmable LED)
- 1 x HDMI 1.4b. 4 x HDMI 2.0
- 1 x VGA
- 1 x ultraONE+ for 10M video + audio output + 24VDC output
- 2 x USB 3.1 type A (5V/1A)
- 2 x Externally accessible SIM card sockets
- 2 x 2.5" removable SSD tray
- 1 x Reset button
- 1 x Power button
- 5 x SMA antenna

## Dimension Drawing

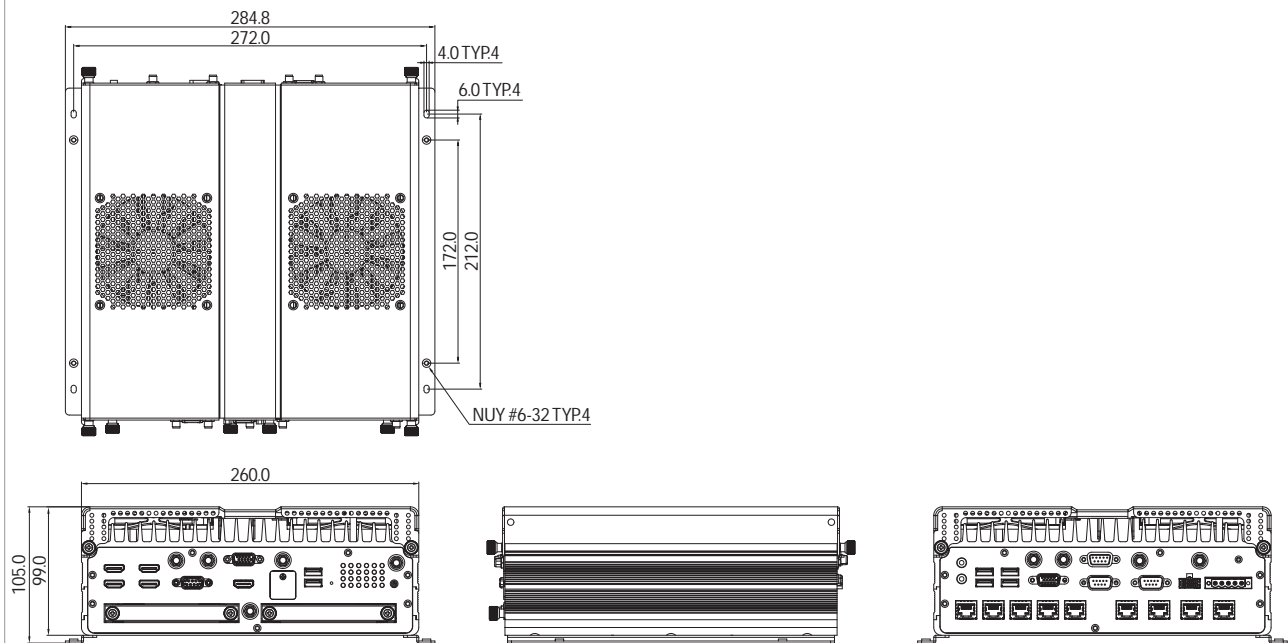

### I/O Interface-Rear

- 8 x PoE 802.3af/at (Max. 60W)
- 1-Port LAN, 10/100/1000 Mbps
- 1 x 5-pin terminal block for 9V~36V DC
- 1 x Mic-in, 1 x Line-out
- 4 x 2 connector for 12VDC/2A output, power button, 2 x MDI
- 2 x DB9 for full RS232
- 1 x DB9 for full RS232/422/485 (RI, 5V/0.5A, 12V/0.5A)
- 1 x DB15
  - 1 x Isolated CANBus 2.0B
  - 1 x GPS DR
  - 4 x DI and 4 x DO
- 4 x SMA antenna
- 4 x USB 3.1 type A (5V/1A)

### Power Management

- Selectable boot-up & shut-down voltage for low power protection by software
- Setting 8-level power on/off delay time by software
- Support S3/S4 suspend mode

### Operating System

- Windows 10/Linux/YOCTO (by request)

### Dimensions

- 260 x 196 x 99 (W x D x H) (mm)

### Weight

- 8.5kg

### Environment

- Operating temperatures
  - -30°C~60°C (w/industrial SSD) with air flow
- Storage temperatures: -40°C~80°C
- Relative humidity: 90% (non-condensing)
- Vibration (random)
  - 2g@5~500 Hz (in operation, SSD)
- Vibration (SSD)
  - Operating: MIL-STD-810G, Method 514.6, Category 4, common carrier US highway truck vibration exposure
  - Storage: MIL-STD-810G, Method 514.6, Category 24, minimum integrity test
- Shock (SSD)
  - Operating: MIL-STD-810G, Method 516.6, Procedure I, functional shock=40g
  - Non-operating: MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

### Certifications

- CE approval, FCC Class A, E13 mark

## Order Information

- **ATC 8010-7A (P/N: 10AT0801000X0)**  
Intel® Core™ 8th Gen. i7-8700T processors, 8GB industrial grade memory, NVIDIA® GeForce® GTX 1050Ti, 8 x PoE 802.3af/at, 3 x mini-PCIe, 1 x M.2, 3 x SIM
- **ATC 8010-7D (P/N: 10AT0801001X0)**  
Intel® Core™ 8th Gen. i7-8700T processors, 8GB industrial grade memory, NVIDIA® GeForce® GTX 1080, 8 x PoE 802.3af/at, 3 x mini-PCIe, 1 x M.2, 3 x SIM