



During installation of ReconaSense, select the Milestone XProtect Driver Version to be used.

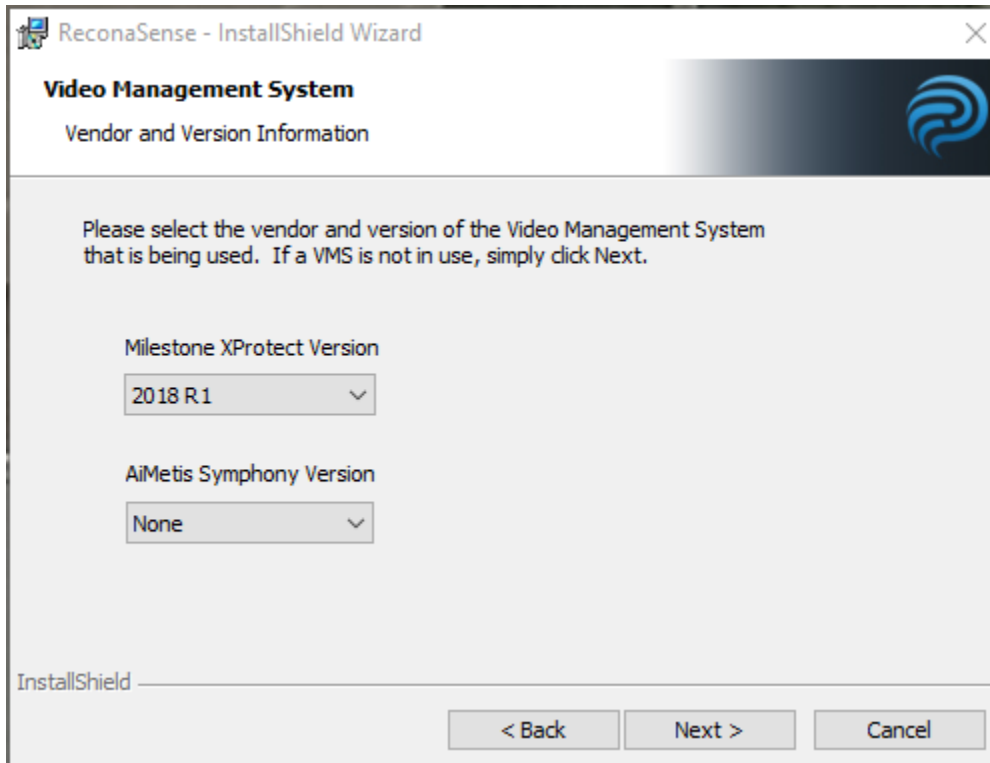

Once installed, open the System Hardware tree, right click on *Appliances*, and add the Milestone Appliance.

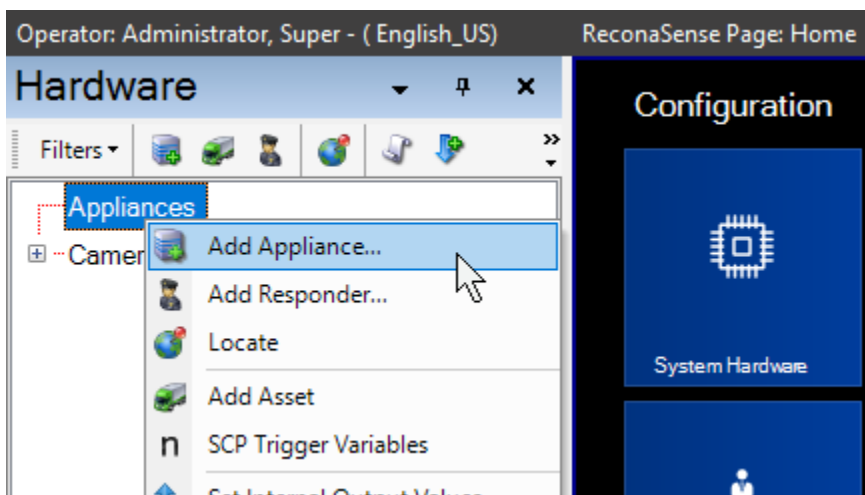


Enter the Name of the Appliance, select the Type of “*Milestone XProtect Service*”, type in the IP address, and enter the username and password of the Milestone system. You can use the *Ping* button to determine if the server is reachable.

The image shows a dialog box titled "Appliance Editor" with the following fields and values:


Field	Value
Name	Milestone
Description	Milestone XProtect Service
Number	1
Location	DESKTOP-4HM428R
Type(s)	Milestone XProtect Service
IP Address	192.168.1.12
User Name	desktop-gg8rs2v\la
Password	a

At the bottom of the dialog, there are three buttons: "Ping", "Cancel", and "Apply". The "Apply" button is highlighted with a blue border.


Right click on the *Milestone Appliance* and select *Add Camera*

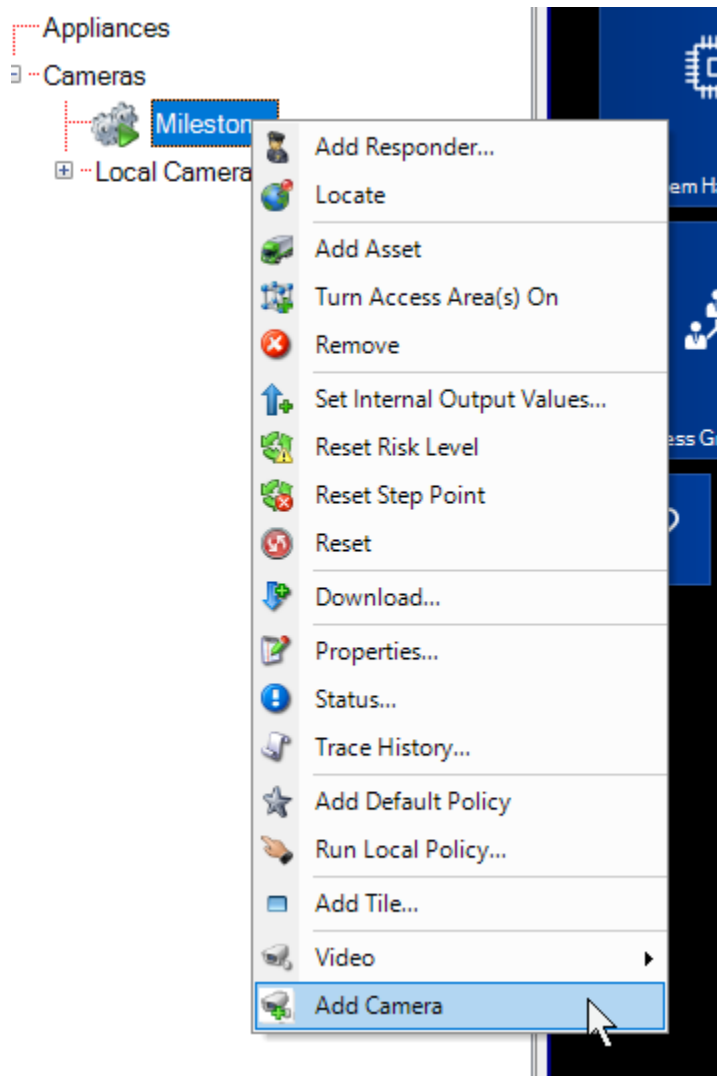


Wait a few seconds and a list of cameras found on the Milestone VMS is presented. Select the cameras to add from the drop-down list and press apply.

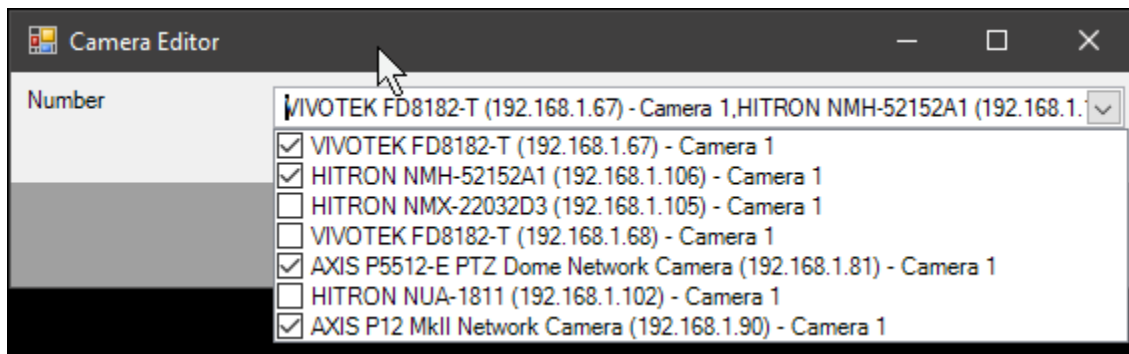

To view a camera, select from the Milestone camera list and right click → Video → Video...

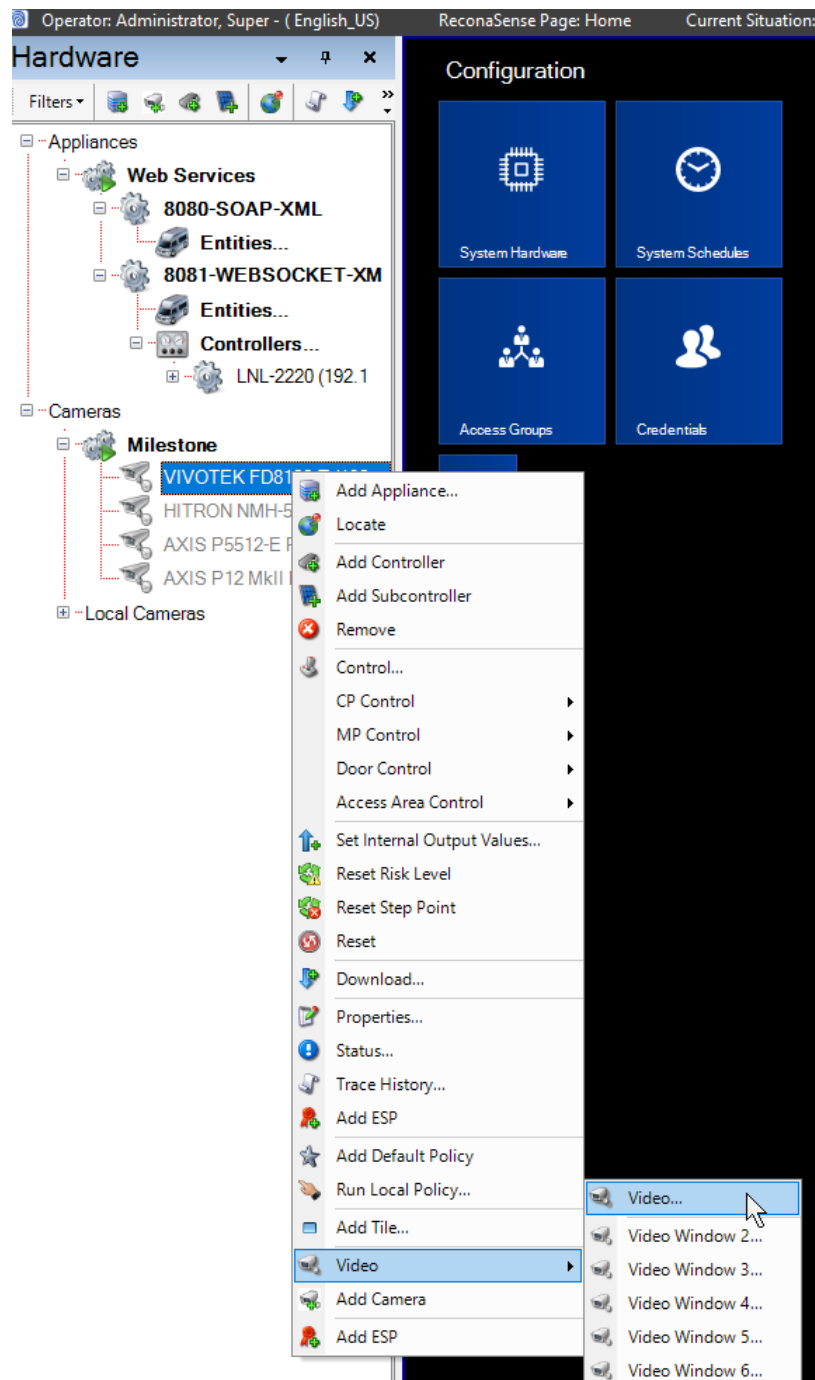

This will start up the Integrated Video Streamer.

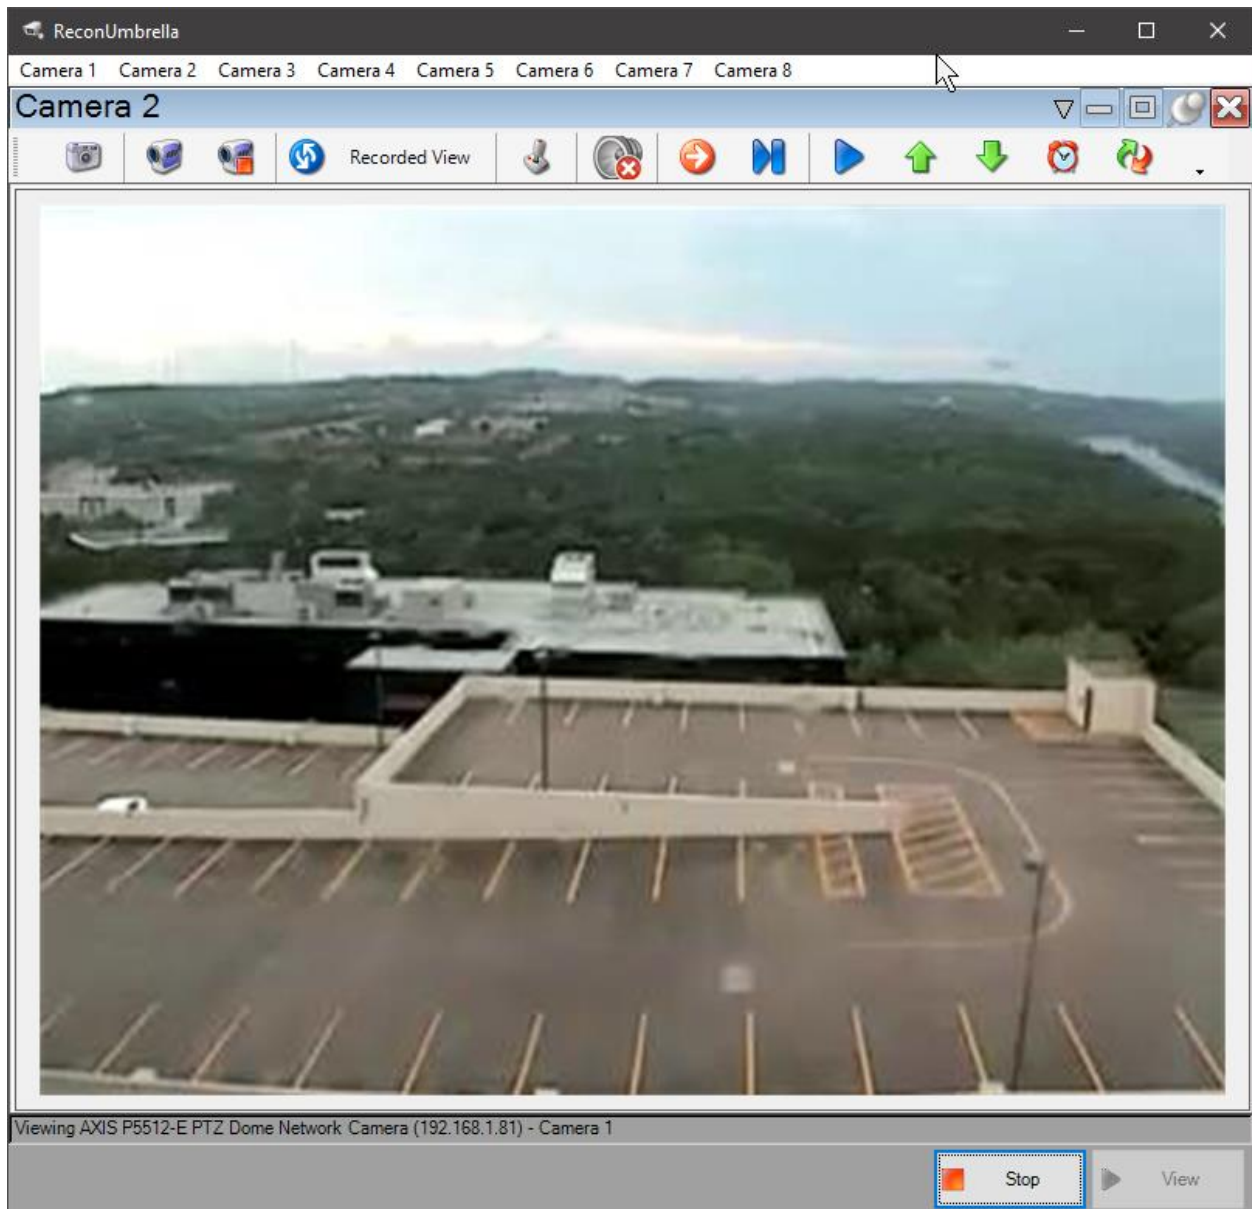

You can stop the video and select a different camera, or select different camera viewers.

